


CARBIDE CUT-OFF SAWS
 (Available in High-Speed Steel, upon request.)

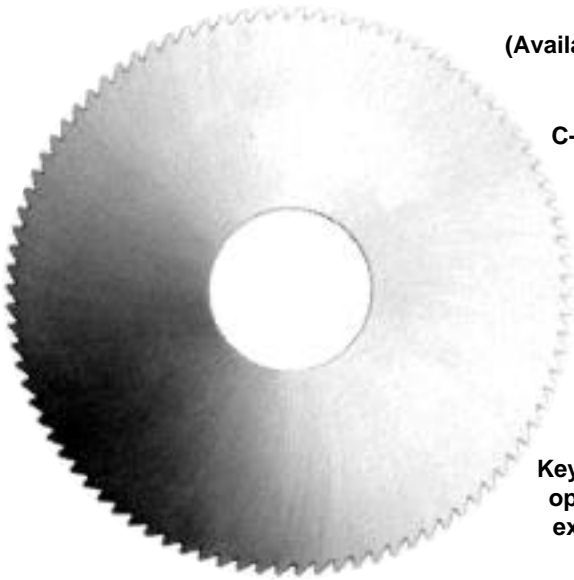

C-2 Carbide

**Hollow Ground
 For Side
 Clearance**

**Rake Angle
 of Teeth: 5°**

**Keyways are
 optional at
 extra cost**

Tolerances: O.D. ±.005; Thickness ±.0005;
 I.D. +.001 -.000
 Closer tolerances available at additional cost.


These saws are used for Rotary Cut-Off applications. The saws are made from C-2 Micro Grain Carbide and are produced to very close tolerances.

STOCK SAWS				
	O.D.	3"	3-1/2"	4"
	Hole	1"	1"	1"
	No. of Teeth			
Thickness		90, 120	90, 120	90, 120
.064"		XSAD064	XSAK064	XSAE064
.045"		XSAD045	XSAK045	XSAE045
.032"		XSAD032	XSAK032	XSAE032

**(ADD TO CATALOGNUMBER WHENORDERING:
 NO. OF TEETH, HIGH SIDE OF SHEAR
 ANGLE (R or L), AND DEGREE OF ANGLE.)**

5 - 10° Cut-Off Angle
 (specify angle desired)

High Side Right,
 Top Teeth Coming
 (Regular)



5 - 10° Cut-Off Angle
 (specify angle desired)

High Side Left,
 Top Teeth Coming
 (Reverse)

**RESHARPENING
 SERVICE**

*Complete resharpening
 service is available.
 Prices on application.*

**COATING
 SERVICE**

*TiN, TiCN and other
 surface coatings are
 available.
 Prices on application.*